

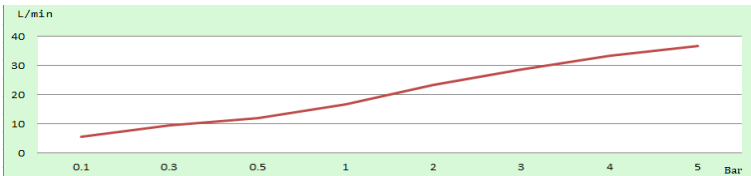
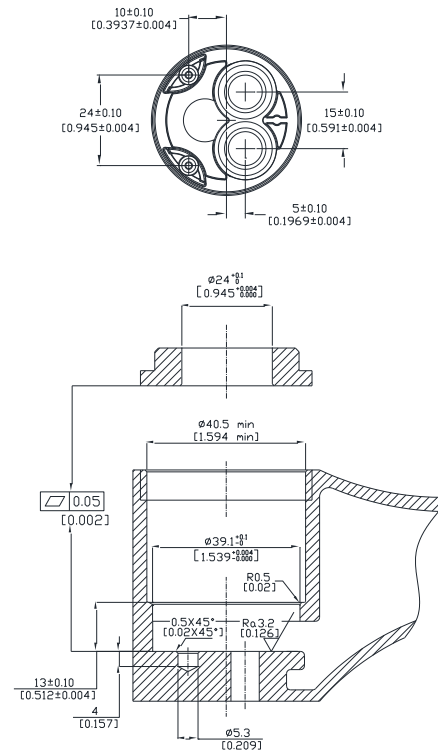



技術指標參數 Technical data			產品型號：K40HSJ-12 (40mm 高腳金屬撥桿閥芯(中間關閉))					
最高使用溫度 Max.temperature	90℃			迫緊上蓋鎖值 Tightening torque		10±1 N.m		
開啟角度 Open angle	25°			旋轉角度 Rotary angle		90°		
水壓流量表 Relation between pressure and flow rate								
壓力 Pressure	0.1bar	0.3bar	0.5bar	1bar	2bar	3bar	4bar	5bar
流量平均值 L/min (無起泡頭) Average flow rate (Free flow)	5.4	9.4	11.8	16.7	23.4	28.7	33.3	36.7
測試項目 Performance test								
扭力測試 Torque test (N.m) (壽命測試前) (Before Life cycle test)	轉左-右 Turn left-right (N.m)			開-關 Open-close (N.m)				
	---			0.05~0.55				
密封測試 Sealing test	靜壓 Static pressure	氣壓 Air pressure		6±1 bar				
		水壓 Water pressure		35 bar				
	靜壓爆破 Burst test			60 bar				
壽命測試 Life test	EN817-70,000 cycles / ASME-500,000 cycles							


以上測試為 KCG 自製龍頭 . The testing faucet is designed by KCG.

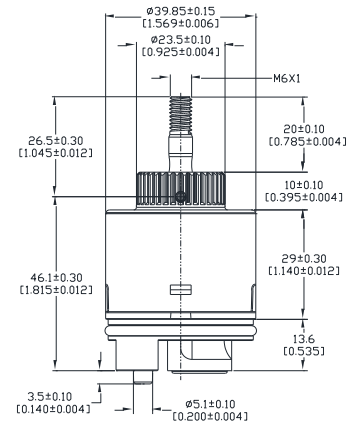

A-A

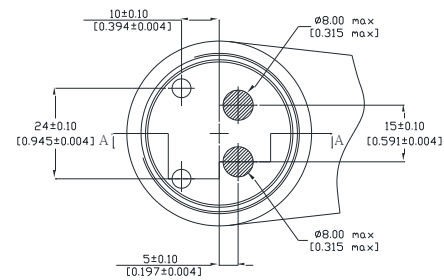

MIX



"NO NEED TO CROSS PIPES TO
GET HOT INLET AT LEFT & COLE
INLET AT RIGHT