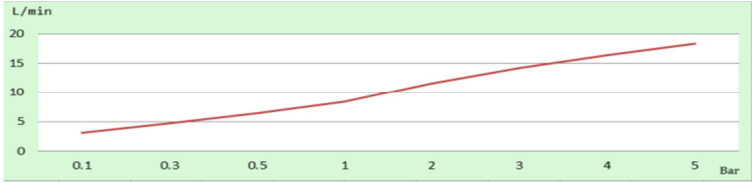




技術指標參數 Technical data		產品型號：K25GSI (32mm 單控式上出水 上下作動閥芯)						
最高使用溫度 Max.temperature	90℃			迫緊上蓋鎖值 Tightening torque			7~8 N.m	
開啟角度 Open angle	22°			旋轉角度 Rotary angle			- -	
水壓流量表 Relation between pressure and flow rate								
壓力 Pressure	0.1bar	0.3bar	0.5bar	1bar	2bar	3bar	4bar	5bar
流量平均值 L/min (無起泡頭) Average flow rate (Free flow)	3.1	4.7	6.4	8.4	11.6	14.3	16.4	18.4
測試項目 Performance test								
扭力測試 Torque test (N.m) (壽命測試前) (Before Life cycle test)	轉左-右 Turn left-right (N.m)			開-關 Open-close (N.m)				
	- -			0.05-0.55				
密封測試 Sealing test	靜壓 Static pressure	氣壓 Air pressure		6±1 bar				
		水壓 Water pressure		35 bar				
	靜壓爆破 Burst test			60 bar				
壽命測試 Life test	EN817-70,000 cycles / ASME-500,000 cycles							

以上測試為 KCG 自製龍頭 . The testing faucet is designed by KCG.

康勤

KCG

Since 1988

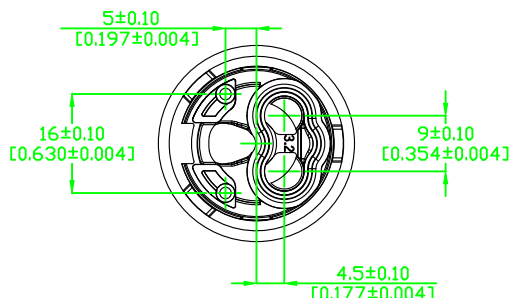


0.05
[0.002]




6.5^{+0.1}_{-0.00}
[0.256^{+0.004}_{-0.000}]

28.5^{+0.1}_{-0.00}
[1.122^{+0.004}_{-0.000}]

3
[0.118]

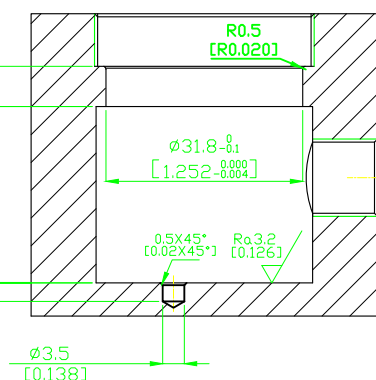

A-A

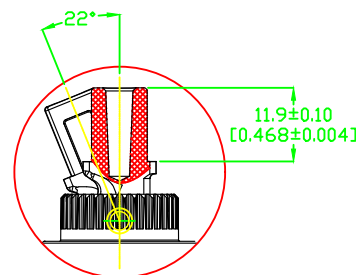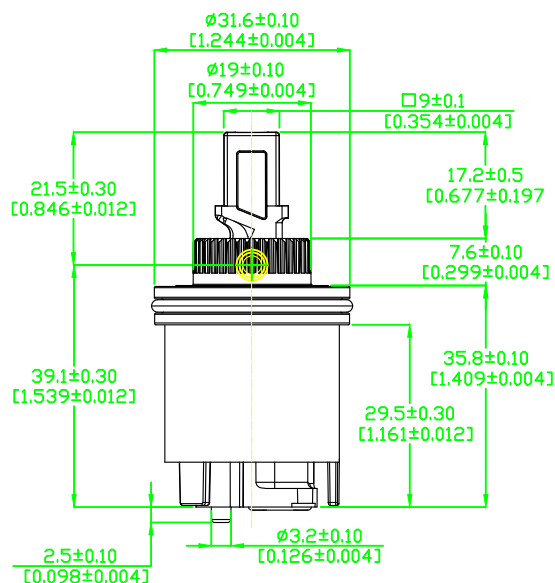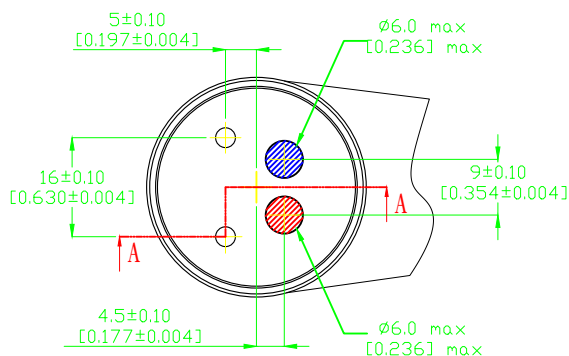

Ceramic Disc Grease: Dow Corning Molykote 7508
Lever Grease: Dow Corning Molykote 7508

康勤有限公司
KUCHING INTL' LTD.

日期 Date	2020. 02. 13	品名 Description	出水嘴 32mm
版次 Rev.	2		32mm On/Off only, side-outlet
單位 Unit	mm	品號 Item NO.	K25GSI-WM-ES01501T12